

9-18-2019

THE APPLICATION OF LSM FOR LONG-TERM FORECASTING OF SPECIFIC FUEL CONSUMPTION BY THE ENERGY SYSTEM OF UZBEKISTAN

D.Y. Losev
Tashkent State Technical University

Follow this and additional works at: <https://uzjournals.edu.uz/btstu>



Part of the [Engineering Commons](#)

Recommended Citation

Losev, D.Y. (2019) "THE APPLICATION OF LSM FOR LONG-TERM FORECASTING OF SPECIFIC FUEL CONSUMPTION BY THE ENERGY SYSTEM OF UZBEKISTAN," *Technical science and innovation*: Vol. 2019 : Iss. 3 , Article 2.

DOI: <https://doi.org/10.51346/tstu-01.19.3.-77-0031>

Available at: <https://uzjournals.edu.uz/btstu/vol2019/iss3/2>

This Article is brought to you for free and open access by 2030 Uzbekistan Research Online. It has been accepted for inclusion in Technical science and innovation by an authorized editor of 2030 Uzbekistan Research Online. For more information, please contact sh.erkinov@edu.uz.

UDC 620.9

THE APPLICATION OF LSM FOR LONG-TERM FORECASTING OF SPECIFIC FUEL CONSUMPTION BY THE ENERGY SYSTEM OF UZBEKISTAN**D.Y. Losev***Tashkent State Technical University***Abstract**

The article considers the possibility of using the least squares method (LSM) for long-term forecasting of the parameters of the regime of electric power systems. There is presented least squares method for predicting the parameters of the regime of electric power systems. It is shown that, based on the least-squares method, it is possible to obtain prognostic equations, as well as coefficients of approximating functions necessary for the formation of these equations. The results of the analysis of the comparison of linear, hyperbolic, logarithmic, exponential and quadratic functions on the use of LSMs to predict specific fuel consumption are presented. Analytical studies are based on statistical data on specific fuel consumption for the period 1990-2016 years by the power system of Uzbekistan. There is shown that the statistical data was divided into training and control samples, when performing an analysis of comparisons of algebraic functions. The training sample, which based on prediction equations are obtained using algebraic functions of various types. The criterion of the least squares method, which is according for using the statistical data of the control sample in the obtained prognostic functions, the standard deviations are found. In the end, there has drawn conclusions, based on the obtained results.

Key words: *energy efficiency, long-term forecasting, power system of Uzbekistan, specific fuel consumption, least squares method, mode parameters, energy resources, energy balance.*

The main task of managing the regimes of electric power systems (EPS) is to satisfy the needs of economic sectors and the population with high-quality electric energy and heat in the short and long term at minimum cost, ensuring energy efficiency of their production and consumption [1, 7-10].

However, in a transition economy, due to insufficient investment and imperfect technical means of monitoring and accounting for the production and consumption of energy resources, including electricity, this requirement is not always feasible. In this context, the issues of predicting operational parameters, as well as specific consumption for supplied electricity, and in particular, increasing their accuracy, are becoming paramount. Moreover, well-known forecasting models that do not take into account the market, random nature of relationships, in practice, often turn out to be unsuitable for planning and managing EPS modes. In such a situation, for the analysis, modeling and forecasting of operating parameters and characteristics of the electrical system, it is advisable to apply methods of direct construction of models from observational data (statistics). Such methods make it possible to identify implicit cause-effect relationships and patterns hidden in retrospective data and to present them in explicit form of mathematical models [3-4, 10-12].

As we know, the management of EPS on the basis of planning (forecasting) is divided into four time levels: long-term (prospective), short-term planning (forecasting), operational and automatic control. At each level, it is necessary to ensure an appropriate balance of energy

production and consumption, which requires maximum forecast accuracy.

Long-term forecasting is the first stage of system research and substantiation of the prospects for the development of energy. It calls to outline the area of acceptable and effective development of the country's fuel-energy complex (FEC), can identify possible problems of the situation and bottlenecks in this development, provide targets, a base and the necessary information to deepen and specify studies in developing the energy strategy, general schemes and development programs for regional industrial energy systems, as well as strategic plans for energy companies. Long-term forecasts play an important role in the modern preparation of the fundamental scientific section in a wide area of knowledge related to the development of energy [2, 13-15].

Long-term forecasting of specific fuel consumption in the whole electric power system, the level and nature of annual electricity consumption is required in order to identify quantitative indicators of the development of energy capacities, the development of the electric network and power transmission networks, as well as the determination of the fuel strategy.

Specific fuel consumption per kW·h of electric energy supplied is one of the main indicators of energy efficiency in the functioning of the electric power industry in Uzbekistan. This parameter refers to the parameters characterizing the long-term (perspective) forecasting, the period of which is from 1-5 to 20 years. In case of expectation of commissioning of capacities by EPS or design and design changes in the network in the near future, a long-term forecast is made for the cycle “months-quarters-years”.

For long-term forecasting based on statistical methods, retrospective statistical information about the parameters and modes of loading of EPS is used. It is based on the apparatus of statistical analysis and forecasting of time series. It should also be noted that in the process of short-term planning of electrical modes, the results obtained from their long-term planning are used, while the solutions are adjusted taking into account the specified circuit-mode conditions. The results of solving the problems of short-term planning of electric modes are transferred to the level of long-term mode control as planned values [5, 15-20].

Consider the results of long-term forecasting of specific fuel consumption in the electric power system of Uzbekistan using the least squares method (least squares) and compare its computational efficiency. Table 1 shows the values of specific fuel consumption for a number of years for JSC «Uzbekenergo», with the help of which a training sample was compiled (data from 1990-2011) to derive approximating functions and a control sample (data from 2012-2016) that allows checking approximating functions.

Table. 1.

<i>the data of training sample</i>									
Years	1990	1991	1992	1993	1994	1995	1996	1997	1998
x_i	1	2	3	4	5	6	7	8	9
y_i	361,5	368,4	368,6	362,5	361,2	362,7	363,4	367,7	369,8

continuation of table. 1

<i>the data of training sample</i>									
Years	1999	2000	2001	2002	2003	2004	2005	2006	2007

x_i	10	11	12	13	14	15	16	17	18
y_i	377,1	379,5	381,9	383,3	384,5	387,7	381,0	377,6	375,0

the end of table. 1

<i>the data of training sample</i>					<i>the data of control sample</i>				
Years	2008	2009	2010	2011	2012	2013	2014	2015	2016
x_i	19	20	21	22	23	24	25	26	27
y_i	380,8	383,6	379,8	378,9	379,9	374,2	375,6	374,8	375,0

In order to determine approximating coefficients of prognostic equations from systems of equations obtained for [6]:

- linear function (LSM-1),
- hyperbolic function (LSM-2),
- logarithmic function (LSM-3),
- exponential function (LSM-4),
- quadratic functions (LSM-5).

We will make the necessary calculations and, according to the criterion of the least squares method (LSM) (1), we determine an approximating function whose sum of the squared deviations is the smallest:

$$\sum_{i=1}^n e_i^2 = \sum_{i=1}^n (y_i - f(x_i))^2 \rightarrow \min. \quad (1)$$

Assume all points $M_1(x_1, y_1), M_2(x_2, y_2), \dots, M_n(x_n, y_n)$ tend to be in a straight line and there is every reason to believe the presence of a linear relationship:

$$y=f(x)=ax+b. \quad (2)$$

Find the coefficients a and b so that the sum of the squared deviations $F(a, b) = \sum_{i=1}^n e_i^2 = \sum_{i=1}^n (y_i - (ax_i + b))^2$ was the smallest. To do this, we find partial derivatives of the first order. According to the rule of linearity, you can differentiate directly under the sum icon:

$$\frac{\partial F}{\partial a} = \left(\sum_{i=1}^n (y_i - (ax_i + b))^2 \right)_a = \sum_{i=1}^n [2(y_i - (ax_i + b)) \cdot (y_i - (ax_i + b))_a] = \quad (3)$$

$$= 2 \sum_{i=1}^n [(y_i - ax_i - b) \cdot (0 - (x_i + 0))] = 2 \sum_{i=1}^n [(y_i - ax_i - b) \cdot (-x_i)] = 2 \sum_{i=1}^n [(ax_i^2 + bx_i - y_i x_i)]$$

$$\frac{\partial F}{\partial b} = \left(\sum_{i=1}^n (y_i - (ax_i + b))^2 \right)_b = \sum_{i=1}^n [2(y_i - (ax_i + b)) \cdot (y_i - (ax_i + b))_b] =$$

$$= 2 \sum_{i=1}^n [(y_i - ax_i - b) \cdot (0 - (0 + 1))] = 2 \sum_{i=1}^n [(ax_i^2 + b - y_i)]$$

(4)

We compose a standard system of equations:

$$\begin{cases} \frac{\partial F}{\partial a} = 0 \\ \frac{\partial F}{\partial b} = 0 \end{cases} \Rightarrow \begin{cases} 2 \sum_{i=1}^n [(ax_i^2 + bx_i - y_i x_i)] = 0 \\ 2 \sum_{i=1}^n (ax_i^2 + x_i - y_i) = 0 \end{cases}$$

(5)

After simplification, the system of equations will have the following form:

$$\begin{cases} a \sum_{i=1}^n x_i^2 + b \sum_{i=1}^n x_i - \sum_{i=1}^n y_i x_i = 0 \\ a \sum_{i=1}^n x_i + \sum_{i=1}^n b - \sum_{i=1}^n y_i = 0 \end{cases} \Rightarrow \begin{cases} a \sum_{i=1}^n x_i^2 + b \sum_{i=1}^n x_i - \sum_{i=1}^n y_i x_i = 0 \\ a \sum_{i=1}^n x_i + \underbrace{\sum_{i=1}^n b + b + \dots + b}_{n \cdot pa3} - \sum_{i=1}^n y_i = 0 \end{cases}$$

(6)

We rewrite the system in the "applied" form:

$$\begin{cases} a \sum_{i=1}^n x_i^2 + b \sum_{i=1}^n x_i = \sum_{i=1}^n y_i x_i \\ a \sum_{i=1}^n x_i + bn = \sum_{i=1}^n y_i \end{cases}$$

(7)

If a function is assumed in the form of hyperbolic (8), logarithmic (9), exponential (10) and quadratic (11), having performed similar calculations (3-7), the system of equations will have the following form:

$$\begin{cases} \frac{\partial F}{\partial a} = 0 \\ \frac{\partial F}{\partial b} = 0 \end{cases} \Rightarrow \begin{cases} a \sum_{i=1}^n \frac{1}{x_i^2} + b \sum_{i=1}^n \frac{1}{x_i} = \sum_{i=1}^n \frac{y_i}{x_i} \\ a \sum_{i=1}^n \frac{1}{x_i} + bn = \sum_{i=1}^n y_i \end{cases}$$

(8)

$$\begin{cases} \frac{\partial F}{\partial a} = 0 \\ \frac{\partial F}{\partial b} = 0 \end{cases} \Rightarrow \begin{cases} a \sum_{i=1}^n \ln(x_i)^2 + b \sum_{i=1}^n \ln(x_i) = \sum_{i=1}^n y_i \ln(x_i) \\ a \sum_{i=1}^n \ln x_i + bn = \sum_{i=1}^n y_i \end{cases}$$

(9)

$$\begin{cases} \frac{\partial F}{\partial a} = 0 \\ \frac{\partial F}{\partial b} = 0 \end{cases} \Rightarrow \begin{cases} a \sum_{i=1}^n x_i^2 + b \sum_{i=1}^n x_i = \sum_{i=1}^n x_i \ln(y_i) \\ a \sum_{i=1}^n x_i + bn = \sum_{i=1}^n \ln(y_i) \end{cases}$$

(10)

$$\begin{cases} \frac{\partial F}{\partial a} = 0 \\ \frac{\partial F}{\partial b} = 0 \\ \frac{\partial F}{\partial c} = 0 \end{cases} \Rightarrow \begin{cases} a \sum_{i=1}^n x_i^4 + b \sum_{i=1}^n x_i^3 + c \sum_{i=1}^n x_i^2 = \sum_{i=1}^n x_i^2 y_i \\ a \sum_{i=1}^n x_i^3 + b \sum_{i=1}^n x_i^2 + c \sum_{i=1}^n x_i = \sum_{i=1}^n x_i y_i \\ a \sum_{i=1}^n x_i^2 + b \sum_{i=1}^n x_i + cn = \sum_{i=1}^n y_i \end{cases}$$

(11)

Based on the data of the training sample, solving the system of equations (7-11) we determine the coefficients with which we will form the following prognostic functions (12-16) LSM-1, LSM-2, LSM-3, LSM-4 and LSM-5, respectively:

$$y=f(x)=1,040373x+362,4039 \tag{12}$$

$$y=f(x)=-23,1112/x+378,2454 \tag{13}$$

$$y=f(x)=-6,35941*\ln(x)+389,3322 \tag{14}$$

$$y=f(x)=366,12*e^{0,0016x} \tag{15}$$

$$y=f(x)=-0,0624x^2+2,4745x+356,67 \tag{16}$$

Based on the control sample, using (12-16), we predict the specific consumption from 2012 to 2016. The calculation results (in ton of standard fuel) are given in table 2.

Table. 2.

Years	Fact	LSM-1	LSM-2	LSM-3	LSM-4	LSM-5
2012	379,9	386,33	376,9	369,39	379,6	380,57
2013	374,2	387,37	376,9	369,12	380,6	380,12
2014	375,6	388,41	377,0	368,86	381,7	379,53
2015	374,8	389,45	377,0	368,61	382,8	378,82
2016	375,0	390,49	377,0	370,35	383,8	377,99

According to the least squares least squares criterion, the least sum of squared deviations was obtained when predicting the quadratic function (LSM-5):

$$\sum_{i=1}^n e_{i \text{ LSM-3}}^2 > \sum_{i=1}^n e_{i \text{ LSM-2}}^2 > \sum_{i=1}^n e_{i \text{ LSM-4}}^2 > \sum_{i=1}^n e_{i \text{ LSM-1}}^2 > \sum_{i=1}^n e_{i \text{ LSM-5}}^2$$

$$3619,7 > 1031,1 > 825,4 > 593,9 > 483,7$$

Figure 1 shows a graph comparing the forecast of specific fuel consumption in the period 2012-2016.

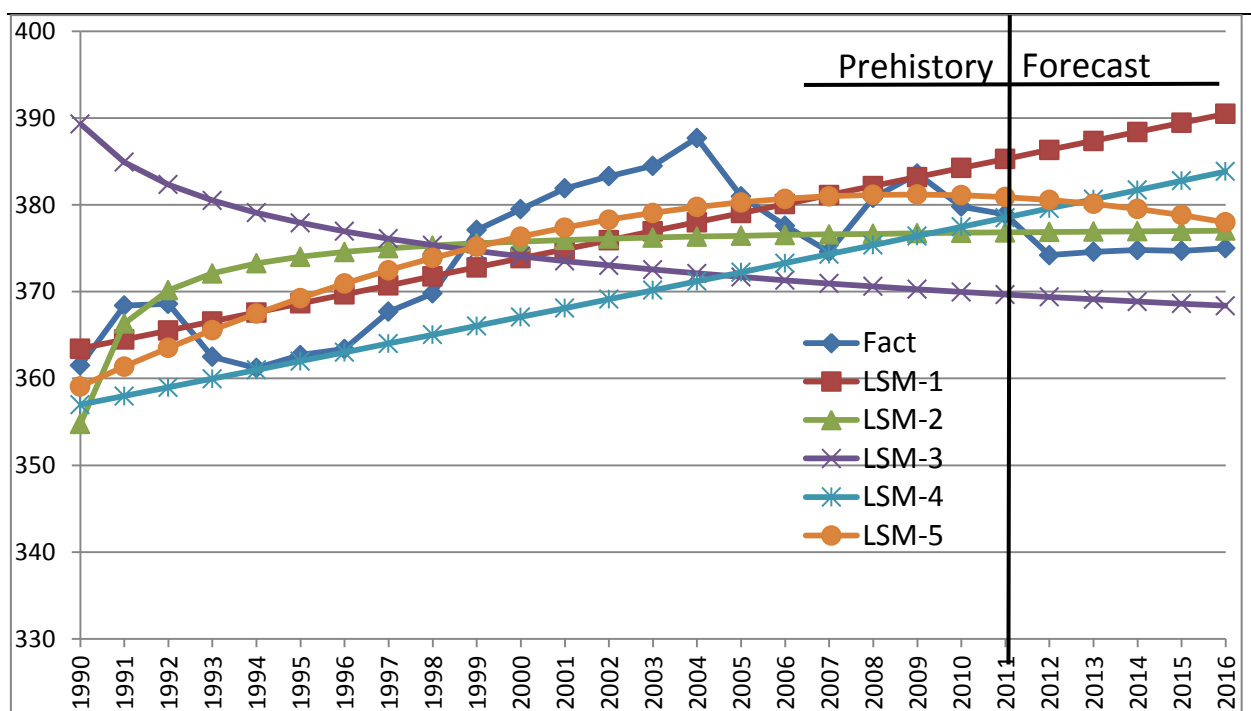


Figure 1. Graphs comparing the forecast for specific fuel consumption in the period 2012-2016 (in ton of standard fuel).

Thus, in conclusion, it should be noted that from the analyzed functions according to the LSM criterion, the least sum of squared deviations was obtained when predicting specific fuel consumption using a polynomial 2-degree function.

References

1. Allaev K.R., Basidov I.S., Sadullaev E.F. Elektroenergetika Uzbekistana za gody Nezavisimosti i perspektivy yeyo razvitiya. –T. Ishoch, 2016, -273 s.
2. Kononov Yu.D. Puti povysheniya obosnovannosti dolgosrochnyx prognozov razvitiya TEK – Novosibirsk: Nauka, 2015, -147 s.
3. Allaev K.R. Elektroenergetika Uzbekistana i mira. –T. «Fan va texnologiya», 2009, -464 s.
4. Allaev K.R. Energetika mira i Uzbekistana. –T.: Moliya, 2007, -388 s.
5. Ivakhnenko A.G. Dolgosrochnoe prognozirovaniye i upravleniye slojnymi sistemami. – Kiyev: Texnika, 1975, -311 s.
6. Mathprofi.ru
7. Uzenergy.uzpak.uz.sjsc@uzpak.uz Khamidov SH.V. Elektroenergetika Respubliki Uzbekistan – sostoyaniye, perspektivy razvitiya i investitsionnyy klimat. Doklad na Biznes – forume v Parizhe (20-23 iyunya 2006 goda), -28 s.
8. Buranov I. Perspektivy povysheniya energoeffektivnosti Respubliki Uzbekistan. T.// Problemy energo- i resursoberezheniya, 2014. №4, S. 20-29.
9. Bikeyeva E.R. Strategicheskiye napravleniya i priority razvitiya elektroenergetiki Uzbekistana v dolgosrochnoy perspektive. T.// Problemy energo- i resursoberezheniya, 2015. №1-2, S. 10-18.
10. Shoismatov E.R. Zadachi energosberezheniya i puti ix resheniya v elektroenergeticheskoy otrasli strany. TGTU. //Problemy energo- i resursoberezheniya, 2003. №1-2, S. 44-54.

11. Zakhidov R.A. Osnovnyye napravleniya energosberezheniya v otraslyakh ekonomiki Uzbekistana. -T. TGTU.// Problemy energo- i resursosberezheniya, 2005. №4, S. 10-19.
12. Teshabayev B.M. Povysheniye energoeffektivnosti elektroenergetiki Uzbekistana. T. diss. uchen. step. k.t.n., 2009. -174 s.
13. Ayuyev B.I. Upravleniye elektropotrebleniyem: administrativnyye i ekonomicheskiye metody// Energorynok, 2007. №4. -25 s.
14. Gitel'man L.D., Ratnikov B.Ye., Kozhevnikov M.V. Upravleniye sprosom – universal'nyy metod resheniya sovremennykh problem elektrosnabzheniya// Energorynok, 2012. №5, S. 44-49.
15. Allayev K.R., Bikeyeva E.R. Energetika – osnova razvitiya ekonomiki Uzbekistana. T.// Problemy energo- i resursosberezheniya, 2008. №1-2, S. 12-29.
16. Ol'khovskiy G.G. Global'nyye problemy energetiki. M.// Elektricheskiye stantsii, 2005. №1, S. 4-10.
17. Teshabayev B.M. Energosbrazheniya-osnova energoeffektivnosti. T.//Problemy energo- i resursosberezheniya, 2007. №1, S.10-16.
18. Teshabayev B.M. Voprosy effektivnosti proizvodstva, peredachi i raspredeleniya elektroenergii v Uzbekistan: sushchestvuyushchaya praktika i novyye podkhody. /Materialy Mezhdunarodnoy konferentsii «Zakonodatel'nyye osnovy ratsional'nogo ispol'zovaniya energii i reformirovaniya elektroenergetiki», Tashkent, 2006. S.30-40.
19. Chernysh Yu.V. Mirovoy opyt reformirovaniya elektroenergetiki. -M. MGU. Avtoreferat na sois. k.e.n., 2013. -24 s.
20. <http://www.rao-ees.ru>. Zarubezhnyy opyt reformirovaniya elektroenergetiki.