

10-19-2018

## Models of multi-ordinary mechatronic models of intellectual robots.

H.N Nazarov

*Tashkent state technical university named after Islom Karimov. Address: Universitetskaya street 2, Tashkent city, Republic of Uzbekistan*

N.R Matyokubov

*Tashkent state technical university named after Islom Karimov. Address: Universitetskaya street 2, Tashkent city, Republic of Uzbekistan, nm85@mail.ru*

Follow this and additional works at: <https://uzjournals.edu.uz/ijctcm>

 Part of the [Engineering Commons](#)

---

### Recommended Citation

Nazarov, H.N and Matyokubov, N.R (2018) "Models of multi-ordinary mechatronic models of intellectual robots.," *Chemical Technology, Control and Management*: Vol. 2018 : Iss. 3 , Article 33.

DOI: <https://doi.org/10.34920/2018.4-5.150-153>

Available at: <https://uzjournals.edu.uz/ijctcm/vol2018/iss3/33>

This Article is brought to you for free and open access by 2030 Uzbekistan Research Online. It has been accepted for inclusion in Chemical Technology, Control and Management by an authorized editor of 2030 Uzbekistan Research Online. For more information, please contact [sh.erkinov@edu.uz](mailto:sh.erkinov@edu.uz).

---

## Models of multi-ordinary mechatronic models of intellectual robots.

### Cover Page Footnote

Tashkent State Technical University, SSC «UZSTROYMATERIALY», SSC «UZKIMYOSANOAT», JV «SOVPLASTITAL», Agency on Intellectual Property of the Republic of Uzbekistan



## MODELS OF MULTI-ORDINARY MECHATRONIC MODELS OF INTELLECTUAL ROBOTS

H.N.Nazarov<sup>1</sup>, N.R.Matyokubov<sup>2</sup>

<sup>1,2</sup>Tashkent state technical university named after Islom Karimov.  
Address: Universitetskaya street 2, Tashkent city, Republic of Uzbekistan  
E-mail: nm85@mail.ru

**Abstract:** In the article mathematic description of mechatronic module in intelligent robots and robotic systems are observed. To display the structure of mechatronic modules, which consist of interrelated different electrical, magnetic and mechatron components, mathematic models by the help of multiplication theory based on relations and visualising lines and points are designed. Analytical explanation of mechatronic modele in intelligent robots is provided.

**Keywords:** robotic systems, mechatronic modele, mathematic models, intelligent robots.

The mathematical description of multicoordinate mechatronic modules (MMM) is the most important stage of the theoretical analysis and synthesis of modules of intelligent robots and robotic systems. At present, the absence of models suitable for a detailed description of the structures of such systems precludes the possibility of automating the design of specific structures.

An element of MMM can be identified with a system that has the properties of material reproducibility and repeatability; therefore, it is naturally possible to define a formal theory of MMM and its model in the language of set theory, as is customary in systems theory.

To display the structures of MMM, consisting of interconnected heterogeneous electrical, magnetic and mechanical components, in the work there are set-theoretic models operating with the following concepts: relations, mappings, unified relation, lines and points:

$$S = \langle L, P, R_L, \pi, R_{L\pi} \rangle,$$

$$S^{-1} = \langle P, L, R_L, \pi, R_{\pi L} \rangle,$$

where L, P - many lines and points;  $R_L$   
- equivalence relation given in the set L;  $\pi$  -  
combined relation given in the set P;  $R_{L\pi}$  -  
mapping of the set L in the set  $\pi$ .

Combined relations in the work are called the combination of binary and ternary relations.

S, S-1 models are transformed into other forms depending on the properties of the relations  $R_L, \pi$  of  $IRL\pi$  mappings and the goals of the problem:

$$S_1 = \langle L, P, \xi, P, \Gamma \rangle;$$

$$S^{-1} = \langle P, L, P, \xi, \Gamma^{-1} \rangle;$$

$$T = \langle L, P, P, C, \Gamma \rangle;$$

$$T^{-1} = \langle P, L, P, C^{-1}, \Gamma^{-1} \rangle;$$

where  $\xi, P$  - families of classes of lines and points, respectively,

$$L_i \in L, P_j \in P \text{ для } i = 1, n, \quad j = 1, m;$$

C - family of properties.  $C^1$  - reverse family of properties;  $C_i$  - many properties,

$$C_i = \left\{ \left\{ C_{iki}^j \right\} \right\}, k = \overline{1, l_{ki}}, \quad j = \overline{1, P_{ki}};$$

$C_{iki}^j$  - many private properties,

$$C_{iki}^j = C_{iki}^0 \cap P_i;$$

$C_{iki}^0$  - original line property  $l_{iki}$ .

$\Gamma, \Gamma^{-1}$  - structural and inverse structural sets, respectively;

$$\Gamma = \{ \Gamma_i \}, i = \overline{1, l}; \Gamma_i - \text{structural class}$$

$$\Gamma_i = \{ \Gamma_{iri} \}, k = \overline{1, l},$$

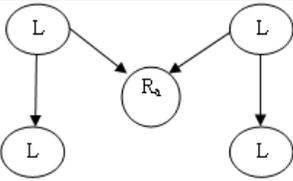
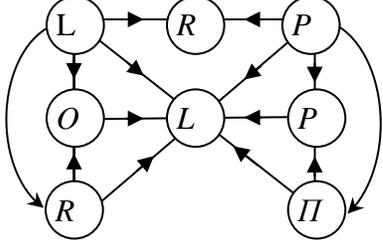
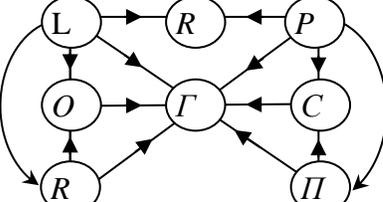
$$\Gamma_{iri} - \text{structural element}; \Gamma_{iri} = \frac{\{ c_{iki} \}}{l_{iki}}, \quad j = \overline{1, P_{ki}}.$$

Three pairs of forms of models (S, S-1, S, S-1, T, T-1) are equivalent in the semantic content of

the information presented by them about the system element and differ from each other only in the ways of representation. When operating with models, the interchangeability of components becomes important, which determines the possibility of excluding from consideration certain components of a model at various stages of its use. The latter becomes possible if the necessary part of information about the deleted components of the model is saved in the remaining ones. In models S, S1, T information about the set L is completely contained in the sets PL, RLπ, Γ, £; information about the set of P- in the sets π RπL, G-1, P; information about RL is contained entirely in the

sets £, Γ, and partly in sets C. Information on RLπ is partially contained in the sets Γ and C. This is shown in Table 1 by graphs whose vertices indicate the amount of information about the components inscribed at the vertices. Solid arcs indicate the complete inclusion of information about a component located at the beginning of the arc. Dotted arcs indicate partial inclusion of information. From Table 1 it can be seen that the exclusion of the component G from the model S1, the components RLπ from the model of type T is impossible, since in this case the remaining parts of the models lose connectivity.

Table 1

№	Types of models	Model graphs
1	<p style="text-align: center;">S  <math>\langle K, P, R_L, \Pi, R_{L\Pi} \rangle</math></p>	
2	<p style="text-align: center;">S<sub>1</sub>  <math>\langle L, P, £, P, L \rangle</math></p>	
3	<p style="text-align: center;">T  <math>\langle L, P, £, C, L \rangle</math></p>	

Comparison of models shows a great flexibility of the type T model, which keeps the remaining parts connected even if the component T is removed with the largest amount (number of incoming arcs) of information, which is impossible in other models. This property of the model allows, in the intermediate calculations, to temporarily exclude some of its components and easily transform the structural set Γ, the family of the line £ or the family of properties C by removing one of the floors in the expression of the structural element. Based on these considerations, in the

work of the model T and T-1 taken as the basis and called structural models.

Analysis of the models showed that all information about the components L, £, C (components P, P, C-1) of the structural model T (models T-1) is completely contained in the structural set G (structural inverse set G-1). This allows us to uniquely find the expression of the components L, £, C (P, P, C-1) of the structural model by the expression of the structural (reverse structural) set and reduce the task of representing

the structural model to the representation of the structural set.

Definition The partition of the linear (point) property corresponding to the partition of  $\mathcal{L}$  (partition of P) is called the colored linear (point) property. Structural sets  $\Gamma$  can be linearly colored ( $\Gamma\Delta$ ), point-colored  $\Gamma\tau$  and linearly point-colored ( $\Gamma\Delta\tau$ ) depending on the partitions  $\xi$  and P. Linearly - pointwise (LT) colored MMM structural sets have the form:

$$\Gamma^{\Delta\tau} = \{ \Gamma_{\mathcal{E}}^{\Delta\tau}, \Gamma_M^{\Delta\tau}, \Gamma_{MX}^{\Delta\tau}, \Gamma_{B3}^{\Delta\tau} \},$$

where,  $\Gamma_{\mathcal{E}}^{\Delta\tau}, \Gamma_M^{\Delta\tau}, \Gamma_{MX}^{\Delta\tau}$  - colored structures of the electrical, magnetic, and mechanical subsystems, respectively;  $\Gamma_{B3}^{\Delta\tau}$  - colored structural sets of the relationship subsystem, which are represented as

$$\Gamma_{\mathcal{E}}^{\Delta\tau} = \{ \Gamma_{\mathcal{E}1}^{\Delta\tau}, \Gamma_{\mathcal{E}2}^{\Delta\tau}, \dots, \Gamma_{\mathcal{E}K}^{\Delta\tau}, \dots, \Gamma_{\mathcal{E}C}^{\Delta\tau} \},$$

$$\Gamma_M^{\Delta\tau} = \{ \Gamma_{M1}^{\Delta\tau}, \Gamma_{M2}^{\Delta\tau}, \dots, \Gamma_{MK}^{\Delta\tau}, \dots, \Gamma_{MC}^{\Delta\tau} \},$$

$$\Gamma_{MX}^{\Delta\tau} = \{ \Gamma_{MX1}^{\Delta\tau}, \Gamma_{MX2}^{\Delta\tau}, \dots, \Gamma_{MXK}^{\Delta\tau}, \dots, \Gamma_{MXl}^{\Delta\tau} \},$$

$$\Gamma_{B3}^{\Delta\tau} = \{ \Gamma_{B31}^{\Delta\tau}, \Gamma_{B32}^{\Delta\tau}, \dots, \Gamma_{B3K}^{\Delta\tau}, \dots, \Gamma_{B3c}^{\Delta\tau} \},$$

$\Gamma_{\mathcal{E}K}^{\Delta\tau}, \Gamma_{MK}^{\Delta\tau}, \Gamma_{MXK}^{\Delta\tau}$  - colored structural elements of the electrical, magnetic and mechanical subsystems, respectively;

$\Gamma_{B3K}^{\Delta\tau}$  - the painted structural element of the relationship subsystem is represented as

$$\Gamma_{\mathcal{E}K}^{\Delta\tau} = \frac{C_{\mathcal{E}K}}{\ell_{\mathcal{E}K}}, \Gamma_{MK}^{\Delta\tau} = \frac{C_{MK}}{\ell_{MK}}, \Gamma_{MXK}^{\Delta\tau} = \frac{C_{MXK}}{\ell_{MXK}}, \Gamma_{B3K}^{\Delta\tau} = \frac{C_{B3K}}{\ell_{B3K}}.$$

Here  $C_{\mathcal{E}K}, C_{MK}, C_{MXK}$  - a family of properties of the electrical, magnetic, and mechanical subsystems, respectively.  $C_{B3K}$  - family of properties of the relationship subsystem.

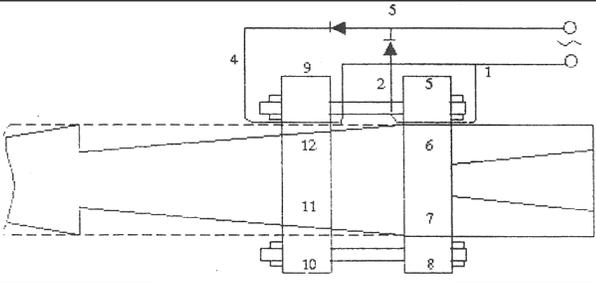
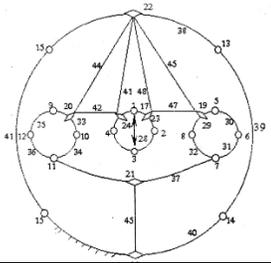
$$C_{\mathcal{E}K} = \{ C_{\mathcal{E}K}^1, C_{\mathcal{E}K}^2, \dots, C_{\mathcal{E}K}^j, \dots, C_{\mathcal{E}K}^p \},$$

$$C_{MK} = \{ C_{MK}^1, C_{MK}^2, \dots, C_{MK}^j, \dots, C_{MK}^p \},$$

$$C_{MXK} = \{ C_{MXK}^1, C_{MXK}^2, \dots, C_{MXK}^j, \dots, C_{MXK}^p \},$$

$$C_{B3K} = \{ C_{B3K}^1, C_{B3K}^2, \dots, C_{B3K}^j, \dots, C_{B3K}^p \}.$$

Таблица 2

Mechatronic module	1	
Topological image	2	
Analytical description	3	$\left[ \frac{1/4 / D18}{24}, \frac{1/2 / D17}{25}, \frac{2/3, 3/4, 1/8}{26, 27, 28} \right];$ $\left[ \frac{8/5 / D19}{29}, \frac{5/6, 6/1, 1/8}{30, 31, 32}, \frac{9/10 / D20}{33}, \frac{10/11, 12/9, 11/12, 1/11 / D21}{34, 36, 35, 37} \right];$ $\left[ \frac{16/13 / D22}{38}, \frac{13/14, 14/15 / D23}{39, 40}, \frac{15/16}{41} \right];$ $\left[ \frac{D18 / D20}{42}, \frac{D17 / D19}{43}, \frac{D20 / D22, D19 / D22, D21 / D23, D18 / D22, D17 / D22}{44, 45, 46, 47, 48} \right].$

In them  $C_{\mathcal{E}K}^j, C_{MK}^j, C_{MXK}^j$  - family of particular properties of the electrical, magnetic, and

mechanical subsystems, respectively;  $C_{B3K}^j$  - family of private properties of the relationship subsystem:

$$C_{\text{ЭК}}^j = \{P_{\text{ЭК}1}^1, P_{\text{ЭК}2}^2, \dots, P_{\text{ЭК}i}^i, \dots, P_{\text{ЭК}j}^{P_{\text{ЭК}j}}\},$$

$$C_{\text{МК}}^j = \{P_{\text{МК}1}^1, P_{\text{МК}2}^2, \dots, P_{\text{МК}i}^i, \dots, P_{\text{МК}j}^{P_{\text{МК}j}}\},$$

$$C_{\text{МХК}}^j = \{P_{\text{МХК}1}^1, P_{\text{МХК}2}^2, \dots, P_{\text{МХК}i}^i, \dots, P_{\text{МХК}j}^{P_{\text{МХК}j}}\},$$

$$C_{\text{ЛЭК}}^j = \{P_{\text{ЛЭК}1}^1, P_{\text{ЛЭК}2}^2, \dots, P_{\text{ЛЭК}i}^i, \dots, P_{\text{ЛЭК}j}^{P_{\text{ЛЭК}j}}\}.$$

Here  $P_{\text{ЭК}j}^l, P_{\text{МК}j}^l, P_{\text{МХК}j}^l$  - colored sets of points of the electrical, magnetic and mechanical subsystems, respectively;

$P_{\text{ЛЭК}j}^l$  -  $\Delta T$  colored set of interconnection subsystem points:

$$P_{\text{ЭК}j}^l = \{P_{\text{Э}1}, P_{\text{Э}2}, \dots, P_{\text{Э}n}, \dots, P_{\text{Э}pl}\},$$

$$P_{\text{МК}j}^l = \{P_{\text{М}1}, P_{\text{М}2}, \dots, P_{\text{М}n}, \dots, P_{\text{М}pl}\},$$

$$P_{\text{МХК}j}^l = \{P_{\text{МХ}1}, P_{\text{МХ}2}, \dots, P_{\text{МХ}n}, \dots, P_{\text{МХ}pl}\},$$

$$P_{\text{ЛЭК}j}^l = \{P_{\text{Б}31}, P_{\text{Б}32}, \dots, P_{\text{Б}3n}, \dots, P_{\text{Б}3pl}\}.$$

In them  $P_{\text{ЭП}}, P_{\text{МП}}, P_{\text{МХП}}$  - points of electrical, magnetic and mechanical subsystems, respectively;  $P_{\text{Б}3П}$  - interconnection subsystem point;  $l_{\text{ЭК}}, l_{\text{МК}}, l_{\text{МХК}}$  - lines of electrical, magnetic and mechanical subsystems, respectively;  $l_{\text{БЭК}}$  - interconnection subsystem line.

Table 2 shows the LD structural sets of a particular mechatronic module [3], which are compiled according to its topological image. In this case, the topological image of MMM is constructed using the abstract concepts of "line" and "dot".

In contrast to the usual ways of displaying MMM graphs of schemes (for example, pole graphs) [4], which do not allow to indicate the entire topology of interconnections, the latter are described in terms by graphs with two- and three-dimensional points. The MMM graph (Table 2) contains mentally divided four

subgraphs: electrical, magnetic, mechanical, and interconnections. Winding on the magnetic core in the MMM column corresponds to the line (25) connecting one-dimensional points (1 and 2)., At the same time. (No. 1-4) - points of the electrical subsystem; (№5-12) - points of the magnetic subsystem; (# 12-16) - points of the mechanical subsystem; (№17-18) - interconnection points (two-dimensional) of the electrical subsystem; (№ 19-21) - points of interrelations of the magnetic subsystem; (№22-23) - interconnection points of the mechanical subsystem; (№24-28), (№29-36), (№37-41) - lines of the electrical, magnetic, mechanical subsystem; (№42-48) - interconnection subsystem lines.

The set-theoretic description of the structures of multi-axis mechatronic modules of intelligent robots and robotic systems allows displaying structures from interconnected physical heterogeneous systems and determining the set of possible structures of modules.

**REFERENCES**

1. P.F.Xasanov, "Figurnotochechny'e modeli i diaopredeliteli matrits" [*Fancy point Models and Matrix Determinants*], Tashkent: O'qituvchi, 1975, 92 p. (in Russian)
2. R.Kapman, P.Farb, M.Arbib, "Ocherki po matematicheskoy teorii sistem" [*Essays on mathematical systems theory*]. M.: Mir, 1971, 215 p. (in Russian)
3. P.F.Xasanov, X.N.Nazarov, "Lineyny'y elektrodvigatel" [*Linear electric motor*], Avt. svid. no. 411581, BI. no. 2, 1974, 5 p. (in Russian)
4. G.Kenig, V.Blekuell, "Teoriya elektromexanicheskix sistem" [*Theory of the Electromechanical system*], Moscow: Energiya, 1965, 456 p. (in Russian)
5. X.N.Nazarov, "Intellektual'ny'e mnogokoordinatny'e mexatronny'e moduli dvijeniya robototexnicheskix sistem" [*Intelligent multi-coordinate mechatronic motion modules of robotic system*], Vestnik TashGTU Tashkent, 2003, no. 2, pp. 23-29. (in Russian)