

10-26-2019

Mathematical Model Of The Implemented Impairer Of The Information Impact Process On The Operative-Technological Communication Network Based On Ip-Technologies

Abdulxak Abdulxairovich Khalikov

Tashkent Institute of Railway Engineers, Address: 1 Adilxodjaeva st., 100167, Tashkent city, Republic of Uzbekistan, xalikov_abdulxak@mail.ru

Olimdjan Khikmatovich Urakov

Tashkent Institute of Railway Engineers, Address: 1 Adilxodjaeva st., 100167, Tashkent city, Republic of Uzbekistan, sherzod_piter@mail.ru

Follow this and additional works at: <https://uzjournals.edu.uz/ijctcm>

 Part of the [Engineering Commons](#)

Recommended Citation

Khalikov, Abdulxak Abdulxairovich and Urakov, Olimdjan Khikmatovich (2019) "Mathematical Model Of The Implemented Impairer Of The Information Impact Process On The Operative-Technological Communication Network Based On Ip-Technologies," *Chemical Technology, Control and Management*: Vol. 2019 : Iss. 4 , Article 7.

Available at: <https://uzjournals.edu.uz/ijctcm/vol2019/iss4/7>

This Article is brought to you for free and open access by 2030 Uzbekistan Research Online. It has been accepted for inclusion in Chemical Technology, Control and Management by an authorized editor of 2030 Uzbekistan Research Online. For more information, please contact sh.erkinov@edu.uz.

Mathematical Model Of The Implemented Impairer Of The Information Impact Process On The Operative-Technological Communication Network Based On Ip-Technologies

Cover Page Footnote

Tashkent State Technical University, SSC «UZSTROYMATERIALY», SSC «UZKIMYOSANOAT», JV «SOVPLASTITAL», Agency on Intellectual Property of the Republic of Uzbekistan

Erratum

?????



UDC 656.254.5

MATHEMATICAL MODEL OF THE IMPLEMENTED IMPAIRER OF THE INFORMATION IMPACT PROCESS ON THE OPERATIVE-TECHNOLOGICAL COMMUNICATION NETWORK BASED ON IP-TECHNOLOGIES

Abdulxak Abdulxairovich Khalikov¹, Olimdjan Khikmatovich Urakov²

¹Tashkent Institute of Railway Engineers

Address: 1 Adilxodjaeva st., 100167, Tashkent city, Republic of Uzbekistan

E-mail: xalikov_abdulxak@mail.ru;

²Tashkent Institute of Railway Engineers

Address: 1 Adilxodjaeva st., 100167, Tashkent city, Republic of Uzbekistan

E-mail: sherzod_piter@mail.ru.

Annotation: The article discusses the mathematical model of the implemented intruder of the process of information impact on the operational-technological communication network based on IP technologies, representing the process of functioning of the IP telephone network in the form of a stochastic network, using the Mason equation for closed graphs, an equivalent function of the stochastic network, the network functioning process operational-technological communication-IP in the conditions of the n th type of cyber attack of the intruder. To demonstrate the method for determining the distribution function of time for bringing data packets in the operational-technological communication-IP network, a particular problem is considered. Using the Mason equation for closed graphs, the equivalent function of the stochastic network is compiled, it is established that the developed model provides results that do not contradict the logic, is sensitive to changes in input parameters and is operable, is in good agreement with the data obtained using known models, and allows you to determine the average time spent on implementation of the selected type of computer attack.

Keywords: operational-technological communication, Mason equations for closed graphs, cyberattack, disruptions, stochastic network, mathematical expectations, data packet transmission time.

Аннотация: Мақолада IP технологиялар асосида тезкор-технологик алоқа тармоғида амалга оширилган ахборотга таъсир ўтказиши жараёнининг математик модели, стохастик тармоқ шаклида IP телефон тармоғининг ишлаш жараёнини акс эттириши, ёпиқ графиклар учун Мейсон тенгламасидан фойдаланган ҳолда, стохастик тармоқнинг эквивалент функцияси, тармоқнинг ишлаш жараёни тасвирланган, таъжовускорнинг кибер хужуми нинг n -тури шароитида тезкор-технологик алоқа-IP тармоғида маълумотлар пакетларини олиб келиши вақтини тақсимлаш функциясини аниқлаш усулини намоиши қилиши учун муайян муаммо кўриб чиқилган. Ёпиқ графиклар учун Мейсон тенгламасидан фойдаланиб, стохастик тармоқнинг эквивалент функцияси тузилган, аниқланган модел мантқиққа зид бўлмаган натижаларни берган, кириш параметрларининг ўзгаришига сезgir ва ишлаш олади, танланган компьютер хужумини амалга оширишида маълум моделлардан фойдаланган ҳолда олинган маълумотларга мос келади ва сарфланган ўртача вақтни аниқлашга имкон беради.

Таянч сўзлар: тезкор-технологик алоқа, ёпиқ графиклар учун Мейсон тенгламаси, киберхужумлар, узлишлар, стохастик тармоқ, математик тахминлар, маълумот узатиши вақти.

Аннотация: Рассматривается математическая модель реализуемого нарушителя процесса информационного воздействия на сеть оперативно-технологической связи на базе IP-технологий, представляя процесс функционирования телефонной IP-сети в виде стохастической сети, с использованием уравнения Мейсона для замкнутых графов составлен эквивалентная функция стохастической сети, процесса функционирования сети оперативно-технологической связи-IP в условиях n -го вида кибератаки нарушителя. Для демонстрации метода определения функции распределения времени доведения пакетов данных в оперативно-технологической связи- IP сети рассмотрена частная задача. Используя уравнение Мейсона для замкнутых графов, составлена эквивалентная функция стохастической сети, установлена, что разработанная модель обеспечивает получение не противоречащих логике результатов, чувствительна к изменениям входных

параметров и работоспособна, хорошо согласуются с данными полученными с использованием известных моделей и позволяет определить среднее время, затрачиваемое на реализации выбранного вида компьютерной атаки.

Ключевые слова: оперативно-технологическая связь, уравнения Мейсона для замкнутых графов, кибератака, нарушения работоспособности, стохастическая сеть, математическая ожидания, время передачи пакета данных.

Introduction

For the Republic of Uzbekistan, railway transport is of great strategic importance. It links together the economic system of the Republic, ensuring the stability of industrial enterprises, timely delivery of the most important goods to the most remote corners of the country. Joint Stock Company “Uzbekistan Temir Yollari” (UTY JSC), currently carries out about 40% of cargo and more 70% of the country's passenger traffic [1].

The quality of the railway transportation process is determined by the speed, reliability and safety of the delivery of goods and passengers to their destination. These indicators depend on the successful functioning and interaction of departments and farms [2, 3]. The significant role of this interaction in telecommunication networks of railway transport. The telecommunication network of railway transport is designed to provide communications for enterprises and structural divisions of railway transport, in accordance with the rules for the technical operation of railways of the Republic of Uzbekistan [10-21]. In accordance with the needs of the railway transport management system, the networks provided to subscribers are necessary volumes and quality of communication are determined taking into account the development of communication technology and the possibility of expanding the list of services.

Research Methods and Results

The potential impacting factors on the OTC network are analyzed, since the results of the analysis show that the main ones can be considered when transmitting information in OTC networks based on IP technologies as: interception of address data; “Denial of service”; “Telephone spam”; "Substitution of numbers" and "theft of services." To ensure the required level of quality of OTC telecommunication services in certain areas, it is necessary to solve the following tasks:

- modeling of the process of functioning of the OTN network based on IP technologies in the context of information impacts. Imagine the process of functioning of an IP telephone network as described in the statement of the problem in the form of a stochastic network [6] (Fig. 1). In the stochastic network, it is indicated: and - the Laplace – Stieltjes transforms of the corresponding distribution functions, which mean the FR value of the packet transmission time without taking into account the cyber attack (CA) of the intruder, that is, under “ideal conditions” and the FR of

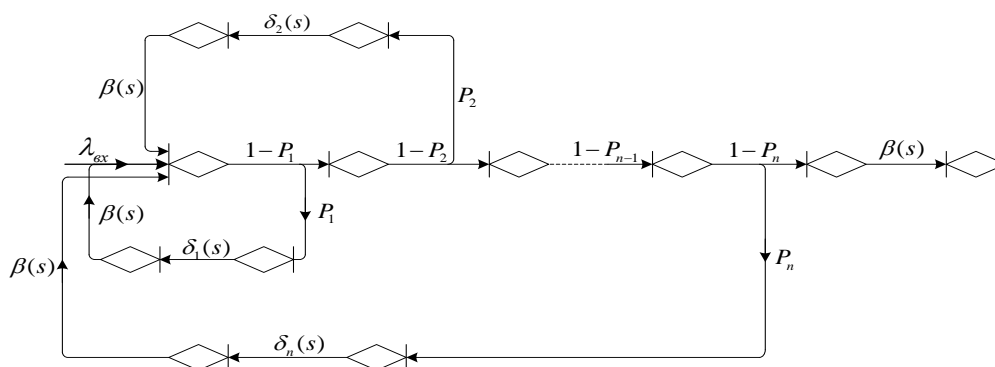


Fig. 1. Stochastic process network.

- the recovery time after the i-th type of spacecraft:
- the functioning of the OTC-IP network in the conditions of the nth type of cyber attack of the intruder

$$\beta(s) = \int_0^{\infty} e^{-st} d[B(t)] \tag{1}$$

$$\delta_i(s) = \int_0^{\infty} e^{-st} d[\Delta_i(t)], \quad i = \overline{1, n} \tag{2}$$

Using the Mason equation for closed graphs [5], we compose the equivalent function of the stochastic network:

$$h_n(s) = \frac{k\beta(s)(\bar{d} + \bar{c} + s) \cdot \prod_{i=1}^n (1 - P_i)}{\left[1 - \beta(s) \sum_{i=1}^n P_i \delta_i(s) \prod_{j=1}^{i-1} (1 - P_j) \right] (\bar{d} + s)} = \frac{V(s)}{U(s)}, \tag{3}$$

$$\bar{d} = \sum_{i=1}^n t_{\delta i}^{-1} P_i; \quad \bar{c} = \sum_{i=1}^n t_{pe i}^{-1} P_i$$

где \bar{d} – mathematical expectations of recovery intensities and implementation by the intruder of the spacecraft, respectively;

$k = \frac{\bar{d}}{\bar{d} + \bar{c}}$ – the likelihood of network elements recovering during a packet retransmission and another spacecraft implementation. To obtain the mathematical expectation and the distribution time distribution function, it is necessary to calculate the value of the derivatives of the polynomials of the numerator and denominator (3) at the point $s = 0$:

$$V'(s) = k \cdot \prod_{i=1}^n (1 - P_i) \left[\beta'(s)(\bar{d} + \bar{c} + s) + \beta(s)(\bar{d} + \bar{c}) \right];$$

$$V'(0) = k(\bar{d} + \bar{c})(1 - \bar{t}_\beta) \cdot \prod_{i=1}^n (1 - P_i); \tag{4}$$

$$U'(s) = d \left[1 - \beta(s) \sum_{i=1}^n P_i \delta_i(s) \prod_{j=1}^{i-1} (1 - P_j) \right] +$$

$$+ (\bar{d} + s) \left[-\beta'(s) \sum_{i=1}^n P_i \delta_i(s) \prod_{j=1}^{i-1} (1 - P_j) - \beta(s) \sum_{i=1}^n P_i \delta_i'(s) \prod_{j=1}^{i-1} (1 - P_j) \right] \tag{5}$$

$$U'(0) = \bar{d} \left[1 - (1 - \bar{t}_\beta) \sum_{i=1}^n P_i \prod_{j=1}^{i-1} (1 - P_j) + \sum_{i=1}^n P_i \bar{t}_{\delta i} \prod_{j=1}^{i-1} (1 - P_j) \right].$$

The mathematical expectation of the packet transmission time in the spacecraft conditions is defined as

$$\bar{T}_h = \frac{-d}{ds} \left[\frac{h_n(s)}{h_n(0)} \right]_{s=0}. \tag{6}$$

Replacing

$$\bar{P} = \prod_{i=1}^n (1 - P_i); \quad \bar{E} = 1 - \sum_{i=1}^n P_i \prod_{j=1}^{i-1} (1 - P_j), \tag{7}$$

we obtain from equation (6) in the form:

$$\bar{T}_h = \frac{\bar{P}}{(1 - \bar{E})^2} \cdot \left[\sum_{i=1}^n P_i \bar{t}_{\delta i} \cdot \prod_{j=1}^{i-1} (1 - P_j) + \bar{t}_\beta \right].$$

Accordingly, the variance is determined by the formula [9, 10]

$$D[t_h] = h_1 - h_1^2 = \frac{d^2}{ds^2} \left[\frac{h_n(s)}{h_n(0)} \right]_{s=0} - \left[\frac{d}{ds} \left[\frac{h_n(s)}{h_n(0)} \right]_{s=0} \right]^2. \quad (8)$$

It is necessary to carry out the reverse process to obtain the function of distribution of packet transmission time, which allows to calculate the original from its image [4, 6]. To demonstrate the described method for determining the distribution function of time for bringing data packets in the OTC-IP network, we consider the following particular problem.

Statement of a particular problem: we assume that the intruder's goal is to block the equipment of the corresponding nodes of the OTC-IP network, to which the intruder performs spacecraft and disrupts their operability with probability and, accordingly. If the operation of the nodes is not broken, then the packet received at the input of the communication channel will be transmitted in a time determined by the technical transmission rate and the amount of data transmitted, i.e. $t_{nep} = V/R$. When transmitting packets of arbitrary volume, it is a random variable distributed according to the law $B(t)$. In the event of a malfunction, the network is restored in a random time t_{ϵ_i} ; $i = \overline{1, n}$ with FR recovery time $\Delta_i(t)$, and the received data packet is retransmit

The incoming stream of data packets is rare, and Cyberattack spacecraft are possible both during packet transmission and in pauses between them. The number of places to wait for the transfer is considered unlimited. It is required to determine the mathematical expectation \bar{T}_h and the time distribution function of the successful $F(t)$ transmission of data packets in the spacecraft conditions implemented by the intruder.

Decision: Imagine the process of functioning of the Operational and technological communication -IP network when an intruder realizes two types of spacecraft in the form of a stochastic network (Fig. 2). Let's pretend that $\Delta_1(t) = 1 - e^{-\delta_1 t}$;

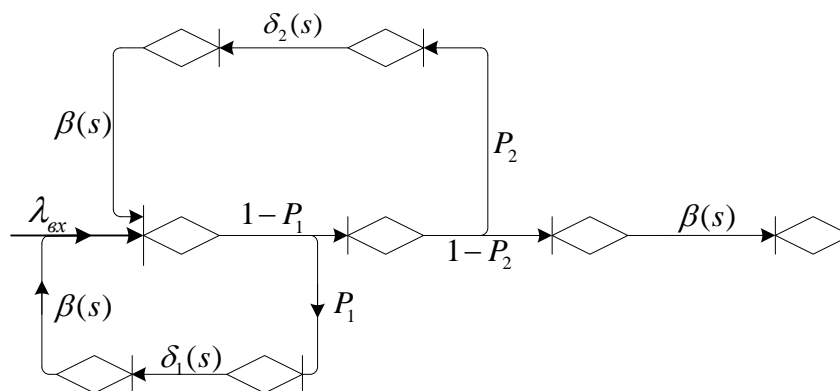


Fig. 2. The stochastic network of the Operational and technological communication-IP network functioning process upon sale by an intruder of two types of spacecraft Cyberattack.

Using the Mason equation for closed graphs, we compose the equivalent function of the stochastic network:

$$h(s) = \frac{(1 - P_1)(1 - P_2) \beta(s) k (\bar{d} + s + \bar{c})}{\left[1 - P_1 \delta_1(s) \beta(s) - P_2 \delta_2(s) \beta(s) (1 - P_1) \right] (\bar{d} + s)}, \quad (9)$$

where $h_0 = \frac{b(P_1-1)(P_2-1)(\bar{c}+\bar{d})}{\bar{d}(P_1+P_2-P_1P_2-b)}$; $\bar{d} = d_1P_1 + d_2P_2$; $\bar{c} = \frac{P_1}{t_{pe1}} + \frac{P_2}{t_{pe2}}$; $k = \frac{\bar{d}}{\bar{d}+\bar{c}}$; $d_1 = \frac{1}{t_{e1}}$; $d_2 = \frac{1}{t_{e2}}$; $b = \frac{1}{t_n}$.

We represent the denominator of the equivalent function in canonical form, that is, this allows us to move on to the Heaviside expansion for the case of simple poles [6, 8]:

$$h(s) = \sum_{i=1}^4 \frac{(\bar{d} + \bar{c} + s)(d_1 + s)(d_2 + s)(1 - P_1)(1 - P_2)bk}{4(s_i)^3 + 3(s_i)^2 \cdot A + 2s_i \cdot B + C}, \tag{10}$$

where: $A = b + \bar{d} + d_1 + d_2$; $B = b\bar{d} - P_2d_2 - P_1d_1 + bd_1 + bd_2 + \bar{d}d_1 + \bar{d}d_2 + d_1d_2 + P_1P_2d_2$;
 $C = b\bar{d}d_1 - P_2\bar{d}d_2 - P_1d_1d_2 - P_2d_1d_2 - P_1\bar{d}d_1 + b\bar{d}d_2 + bd_1d_2 + \bar{d}d_1d_2 + P_1P_2\bar{d}d_2 + P_1P_2d_1d_2$.

Average time \bar{T}_h successful packet transmission equals:

$$\bar{T}_h = \frac{k(P_1-1)(P_2-1)[\bar{d}^2 d_1 d_2 - P_2^2 b \bar{d}^2 d_1 + b \bar{c} d_1 d_2 + \bar{c} \bar{d} d_1 d_2 + P_1 b \bar{d}^2 d_2 + P_2 b \bar{d}^2 d_1 - b \bar{d}^2 d_1 d_2 (P_2 - P_2^2 + P_1 - 1)^2 - P_2^2 b \bar{c} d d_1 + P_2^2 b \bar{c} d_1 d_2 + P_1 b \bar{c} d d_2 + P_2 b \bar{c} d d_1 - P_1 b \bar{c} d_1 d_2 - P_2 b \bar{c} d_1 d_2]}{\bar{d}^2 d_1 d_2 (P_2 - P_2^2 + P_1 - 1)^2} \cdot h(0) \tag{11}$$

The probability density function of the transmission time probability

$$h(t) = \sum_{i=0}^3 \frac{\left[(\bar{d} + s_i + \bar{c})(d_1 + s_i)(d_2 + s_i)(1 - P_2)bk \right] \cdot e^{s_i t}}{\left[4(s_i)^3 + 3(s_i)^2 \cdot A + 2s_i \cdot B + C \right] (-s_i) h_0 k}, \tag{12}$$

and the integral function of the probability distribution density of the transmission time

$$H(t) = \sum_{i=0}^3 \frac{\left[(\bar{d} + s_i + \bar{c})(d_1 + s_i)(d_2 + s_i)(1 - P_2)bk \right] \cdot (1 - e^{s_i t})}{\left[4(s_i)^3 + 3(s_i)^2 \cdot A + 2s_i \cdot B + C \right] (-s_i) h_0 (s_i) - s_k}. \tag{13}$$

According to formulas (11–13), calculations were performed, the results of which are presented as a family of distribution functions in Fig. 3.

During the calculations, it was assumed that:

- average data packet transmission time with volume V=10mbit between the corresponding nodes is equal to 1s;
- the average recovery time of the operational and technological communication-IP network after successful implementation by the intruder cyberattacks of the spacecraft varies within $tb1=3...5S$ and, $tb2=2,5...4S$ respectively;
- average implementation time by the intruder cyberattacks equally $tpb1=50S$ and $tpb2 = 100S$;
- average implementation time by the intruder cyberattacks equally $tpb1=50S$ and $tpb2 = 100S$;
- the probability of successful implementation by the intruder cyberattacks of the spacecraft takes values in the range of 0.08–0.8.

In terms of implementation cyberattacks the role of the effectiveness of the mechanism for organizing information security networks operational and technological communication based on IP-technologies, characterizing the working time in the model after cyberattacks.

So, for example, if the offender is likely to succeed cyberattacks $P_i = 0,5$ a slight increase in the recovery time leads to a sharp increase in the average transmission time of packets [7, 8]:

- the time of successful transmission of information in the network depends on the ability of the intruder to render cyberattacks the spacecraft to the network elements.

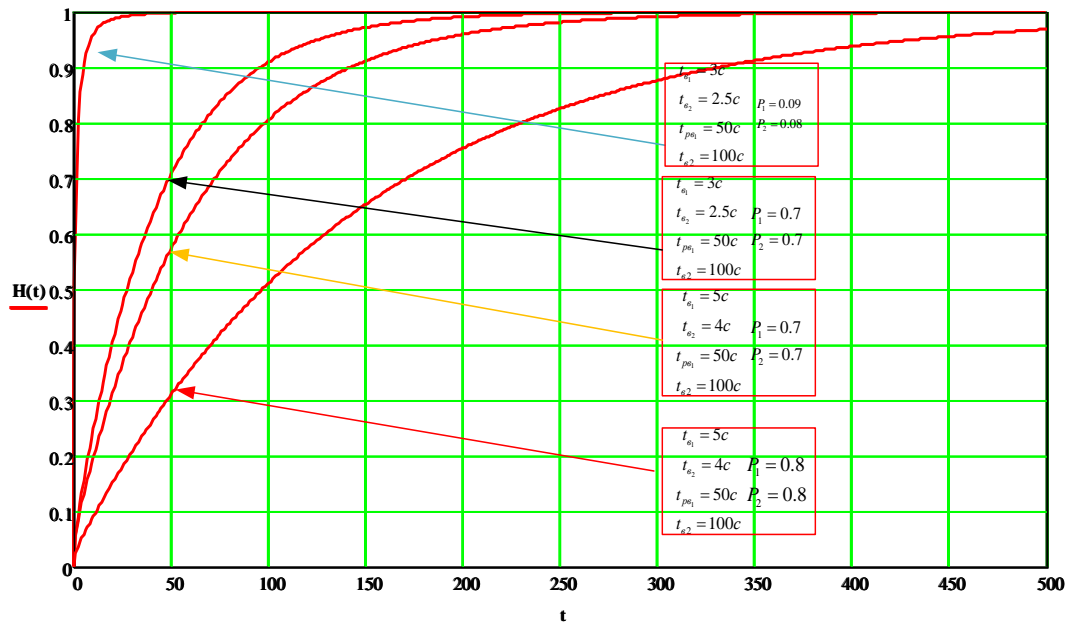


Fig. 3. The family of functions for the distribution of packet transmission time in the operational and technological communication -IP network during the implementation of two types of spacecraft cyberattack.

So, for example, if the intruder is able to successfully implement the impact with a probability no worse $P_i = 0,7$, we should expect an increase in the average time for bringing information on the network by more than five times;

- the law of distribution of time of successful transmission of a packet in the general case is hyperexponential and, as shown in [7–9], can be approximated with sufficient accuracy by an incomplete Gamma function. Calculations show that the resulting distribution has significant right-hand asymmetry (asymmetry coefficient $K_A \geq 1,9$ is insignificantly peaked (excess coefficient $E_A \geq 5,7$, and the stream of successfully transmitted packets is heterogeneous (coefficient of variation $K_B \geq 1,3$) [5].

$$\text{Expect packet flow parameter of successfully transmitted packets } \lambda(t) = \frac{f(t)}{1 - F(t)}$$

is unstable in time and when:

$$\lim_{t \rightarrow \infty} \lambda(t) = \lim_{t \rightarrow \infty} \frac{\sum_{k=1}^n \frac{V(s_k)}{U'(s_k)} e^{s_k t}}{1 - \left(\sum_{k=1}^n \frac{V(s_k)}{U'(s_k)} s_k^{-1} (1 - e^{s_k t}) \right)} = \frac{\sum_{k=1}^n \frac{V(s_k)}{U'(s_k)} e^{s_k t} \cdot s_k}{\sum_{k=1}^n \frac{V(s_k)}{U'(s_k)} e^{s_k t}} \leq \frac{1}{T_h}; \quad (14)$$

that is, the intensity of successful packet transmission does not exceed the intensity defined as the reciprocal of the average time of successful packet transmission $\frac{1}{T_h}$.

Conclusion

Thus, the stream of successfully transmitted packets is not the simplest, in connection with which the task of assessing the time of information transfer in the networks of operational-technological communication with IP-telephony is relevant for the case when the incoming stream is not rare, but corresponds to the actual interaction of the corresponding pairs in the network, the developed model ensures the receipt of results that do not contradict the logic, is sensitive to changes

in input parameters and is operable; they are in good agreement with the data obtained using known models and allows you to determine the average time spent on the implementation of the selected type of computer attack.

References:

1. Uzbek Railways: official site. - URL .: <http://railway.uz/ru> (date of treatment 09/12/2018).
2. Operational and technological telephone communication in railway transport: Textbook for universities of railway transport / Yu.V. Yurkin, A.K. Lebedinsky, V.A. Prokofiev, I.D. Blinder Ed. Yu.V. Yurkina. - M .: State Educational Institution "Educational and Methodological Center for Education in Railway Transport", 2007. –264 p.
3. Kudryashov, V.A. Transport communication: textbook for universities railway. transport / V.A. Kudryashov, A.D. Mochenov; under. ed. V.A. Kudryashova. - M.: Route, 2005.– 294 p.
4. Ventzel E.S. Probability Theory / Study Guide for University Students: 10th ed. - M .: Higher. school, 2006 .-- 575 s.
5. Lozhkovsky A.G. Calculation of the characteristics of a system with a queue with self-similar network traffic / A.G. Lozhkovsky, A.S. Popova. - 2016. - No. 2. - S. 80–87.
6. Privalov A.A. The method of topological transformation of stochastic networks and its use for the analysis of communication systems of the Navy / A.A. Privalov. - SPb. : BMA, 2000.- 166 p. 7. Privalo, A.A. The mathematical model of the XSS attack / A.A. Privalov, Yu.S. Karabanov, A.O. Kravtsov, S.I. Sidorov // *Izv. PGUPS*. - 2018 .-- T. 15, no. 1. - S. 167–172.
7. Privalov II. Introduction to the theory of functions of a complex variable: a textbook / II. Privalov. - M.: Nauka, 1984 .-- 355 p.
8. Bocharov, I.O. Voice over IP networks / I.O.Bocharov, M.K. Tsybulin // *Telecommunication*. - Vol. 6. - P. 41–42.
9. Dudnik, B.Ya. Reliability and reliability of communication systems / V.F. Ovcharenko, V.K. Orlov et al .; under the editorship of B.Ya. Angelica. - M .: Radio and communications, 1984. - 216 p.
10. Khalikov A.A., Urakov O.Kh. The introduction of modified devices for operational-technological communication on the Angren-Pop railway section. // *Muhammad Al-Khorazmiy avlodlari Ilmiy-amaliy wa ahborot-taliliy journal* No. 3 (5) / 2018. –S. 89-94.
11. Khalikov A.A., Urakov O.Kh. The tasks of organizing and managing the integrated digital network of operational and technological communication based on PIC-D devices at the Angren-Pap railway sections. // *Journal "European science review"* No. 9-10.2018. September-Oktober. Volume 1. pp. 220-227.
12. Khalikov A.A., Urakov O.Kh. Distribution of telephone load in networks of operational-technological communication of JSC "Uzbekistan Temir Yollari". // *Norway NJDIS Magazine* No. 29 (1). VOL 1. 2019. 52-55.
13. Khalikov A.A., Urakov O.Kh. Analysis of the existing network of operational - technological communication using IP-technology and their effective development to improve the transportation process of JSC "Uzbekistan Temir Yollari" // *MIAJ "Crede Experto: transport, society, education, language"*. Electronic journal. Irkutsk-2019. No. 2.
14. Khalikov A.A., Urakov O.Kh. Existing problems and prospects for the development of train radio communications in the Kamchik railway tunnel // *Materials in the proceedings of the conference series: "International scientific review"*. (Boston. USA. No. 11 (53). 2018. November. - S. 24-28.
15. Khalikov A.A., Urakov O.Kh. Problems and prospects for the development of train radio communications in the Kamchik railway tunnel // *Bulletin of scientific conferences 2018. N 10-4 (38)*. - S.118-119. Science and education in the XXI century. Based on materials from the international scientific and practical conference October 31, 2018, Part 4.
16. Khalikov A.A., Urakov O.Kh. Distribution of telephone load in networks of operational-technological communication of JSC "Uzbekistan Temir Yollari". // *Problems of receiving, processing and transmitting measuring information II International scientific and technical conference dedicated to the 90th anniversary of the birth of Professor Zaripov Madiyar Fakhritdinovich*. September 19-20, 2019, Ufa, Russia. -S.9-12.
17. Khalikov A.A., Mirsagdiev O.A. Development of information measuring systems based on fiber optic sensors. *Problems of receiving, processing and transmitting measurement information. II International Scientific and Technical Conference dedicated to the 90th anniversary of the birth of Professor Zaripov Madiyar Fakhritdinovich* September 19-20, 2019, Ufa, Russia. - S.207-212.
18. Khalikov A.A., Mirsagdiev O.A. Assessment of telephone load on the channels of operational technological communication. *Muxammad al-Khorazmiy Avlodlari*. Tashkent 3 (9) / 2019. -C. 48-52.
19. Khalikov A.A., Urakov O.Kh. The development of wireless communications in rail transport. Collection of reports of the Republican scientific and technical conference "Modern problems and their solutions of information and communication technologies and telecommunications" I - Part of Ferghana May 30-31, 2019. -S.9-12.
20. Khalikov A.A., Mirsagdiev O.A. Temir yʻil transportation technologist aloq tarmoklarida yangi avlod telecommunication tizimlarini qʻyllash. *Muhammad al-Khorazmiy avlodlari Ilmiy-amaliy wa ahborot-taliliy magazine* number 1. 2019.- S. 52-55.
21. Khalikov A.A., Mirsagdiev O.A. Improving the systems of operational - technological communication of the railway of Uzbekistan with the use of packet switching. Monograph. Fan wa technology. Tashkent 2019. –182 p.